


NYMPHEA BLACK & WHITE plafond




CE

Power	32 W	Voltage	230 V
Luminous flux*	3380 lm (360°)	Colour of light	WW
Beam angle	115 °	IK	04
Degree of protection (IP)	IP54		

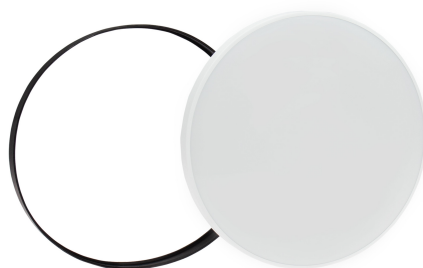

 User manual



 Declaration of Conformity

Technical data:

Code	SLI031036WW_PW
Power	32 W
Nominal current	142 mA
Voltage	230 V
Energy efficiency class	F
Energy consumption	32 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Power factor	0.98
Useful luminous flux*	3380 lm (360°)
Luminous flux**	2200 lm (360°)
Lamp efficacy	106 lm/W
Luminous intensity	1360 cd
Colour of light	WW
Beam angle	115 °
RA	>80
Light source included	+
Uniformity of color SDCM max	5
Dimmable	-
Working temperature range	-20 +40 °
Lifespan	17000 h
Housing material	TWORZYWO SZTUCZNE
IK	04
Degree of protection (IP)	IP54
Colour	White
Dimension (AxBxC)	Ø 380 x 55 mm
Weight	0.64 kg
For use	Inside/Outside
Assembly method	On the ceiling
Application	Inside/Outside
Number of pieces on the packaging	10 pcs.
Made in	PRC



*applies to the LED source used. **Luminaire luminous flux