



HALLS LINE high bay




CE

Power	150 W	Voltage	230 V
Luminous flux*	23000 lm (360°)	Colour of light	NW
Beam angle	75x140 °	UGR	n/a lm
IK	10	Degree of protection (IP)	IP66

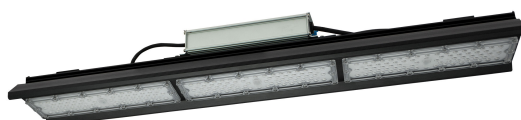

See more on dedicated page 




 User manual



 Declaration of Conformity

Technical data:

Code	SLI048003NW_PW
Power	150 W
Nominal current	670 mA
Voltage	230 V
Energy efficiency class	D
Energy consumption	150 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	Yes
Power factor	0.95
Useful luminous flux*	23000 lm (360°)
Luminous flux**	21000 lm (360°)
Lamp efficacy	153 lm/W
Luminous intensity	11000 cd
Colour of light	NW
Beam angle	75x140 °
UGR	n/a
RA	>80
Light source included	Yes
Dimmable	+
Working temperature range	-20 +40 °
Lifespan	50000 h
Housing material	Aluminum
IK	10
Degree of protection (IP)	IP66
Colour	Black
Dimension (AxBxC)	745x126x95 mm
For use	Outside/Inside
Assembly method	Suspended
Whether it should work in conditions other than normal	Yes
Made in	PRC



*applies to the LED source used. **Luminaire luminous flux